

# BEETLE THE SMALLEST LOCK WORLDWIDE

With just 40 x 40 x 12 mm, the beetle is the smallest locks for showcases, cabinets, sliding doors, drawers and swing doors.

#### Features:

- small neat design
- · robust metal case
- stainless steel look
- three-dimensional opening
- small, robust servo motor

Current consumption at maximum load: 500 mA Current consumption in normal condition: 100 mA





The BEETLE 12V/3V is operated with a voltage of 8-16/2-3 V DC. Usually a double throw switch or a relay is used.

### **BEETLE 3V**

- 2-3V DC open (brown)
- 2-3V DC close (black)
- 0 V DC GND (blue)
- 1.5 m cable

#### **BEETLE 12V**

- 8-16V DC open (brown)
- 8-16V DC close (black)
- 0 V GND (blue)
- 1.5 m cable

ARTICLENUMBER	BEETLE 3V
CUSTOMS TARIF NUMBER	83013000
COUNTRY OF ORIGIN	Austria

ARTICLENUMBER	BEETLE 12V
CUSTOMS TARIF NUMBER	83013000
COUNTRY OF ORIGIN	Austria

ARTICLE NUMBER	BEETLE Secondary
CUSTOMS TARIF NUMBER	83013000
COUNTRY OF ORIGIN	Austria

## **BEETLE SECONDARY**

In combination with our furniture locks you can use the BEETLE SECONDARY as a "slave". It has a 1,5m cable which can be plugged directly into the lock. If you want to use more than two BEETLE locks with the SOLO, we recommend to use an external power supply as the power consumption is very high. Maximum five BEETLE SECONDARY's can be used with a SOLO.


Cable length: 1.5 m

**Attention**: If you use the BEETLE SECONDARY in combination with a battery driven SOLO lock, it will stay open in case of a battery-low alarm.

Copyright by: PS GmbH Melisau 1255 6863 Egg Irrtümer und Änderungen vorbehalten. Technische und Design-Änderungen vorbehalten Errors and omissions expected. Technical and desing-modifications are subjects to change.

PS GmbH Melisau 1255 6863 Egg AUSTRIA Tel.: 0043 699 13335155 Email: info@pslocks.com www.pslocks.com

Weitere Informationen entnehmen Sie bitte unserer Website. Further information you can find on our website.

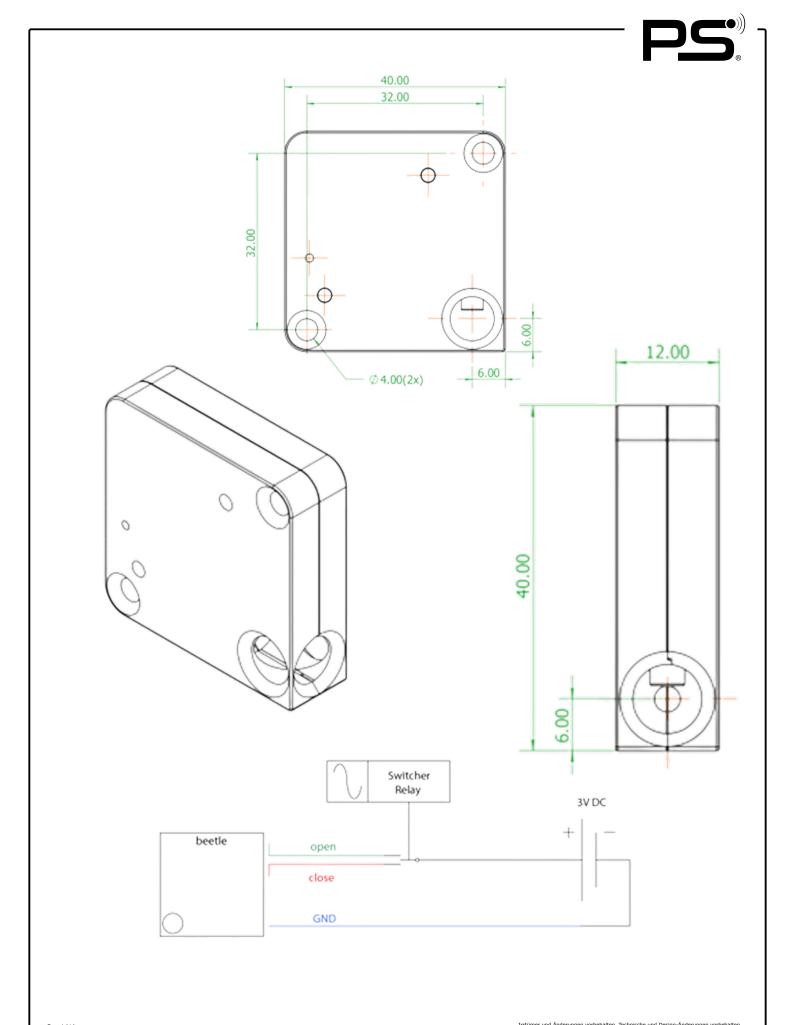

Copyright by: PS GmbH Melisau 1255 6863 Egg Irrtümer und Änderungen vorbehalten. Technische und Design-Änderungen vorbehalten Errors and omissions expected. Technical and desing-modifications are subjects to change.

PS GmbH Melisau 1255 6863 Egg AUSTRIA Tel.: 0043 699 13335155 Email: info@pslocks.com www.pslocks.com

Weitere Informationen entnehmen Sie bitte unserer Website. Further information you can find on our website.